


3 Pole G Type Flat Extender Leads

Overview

The 166G (Flat) range of connectors is ideal for applications where space is minimal, due to their low profile. Together with the options of panel mount connectors & moulded tee pieces, these assemblies provide simple connectivity between luminaires. The 166G(F) range of connectors is designed for main connection according to EN 61 984 (connected and disconnected under load) and used in installation systems when using the additional locking slides (VDE 0628).

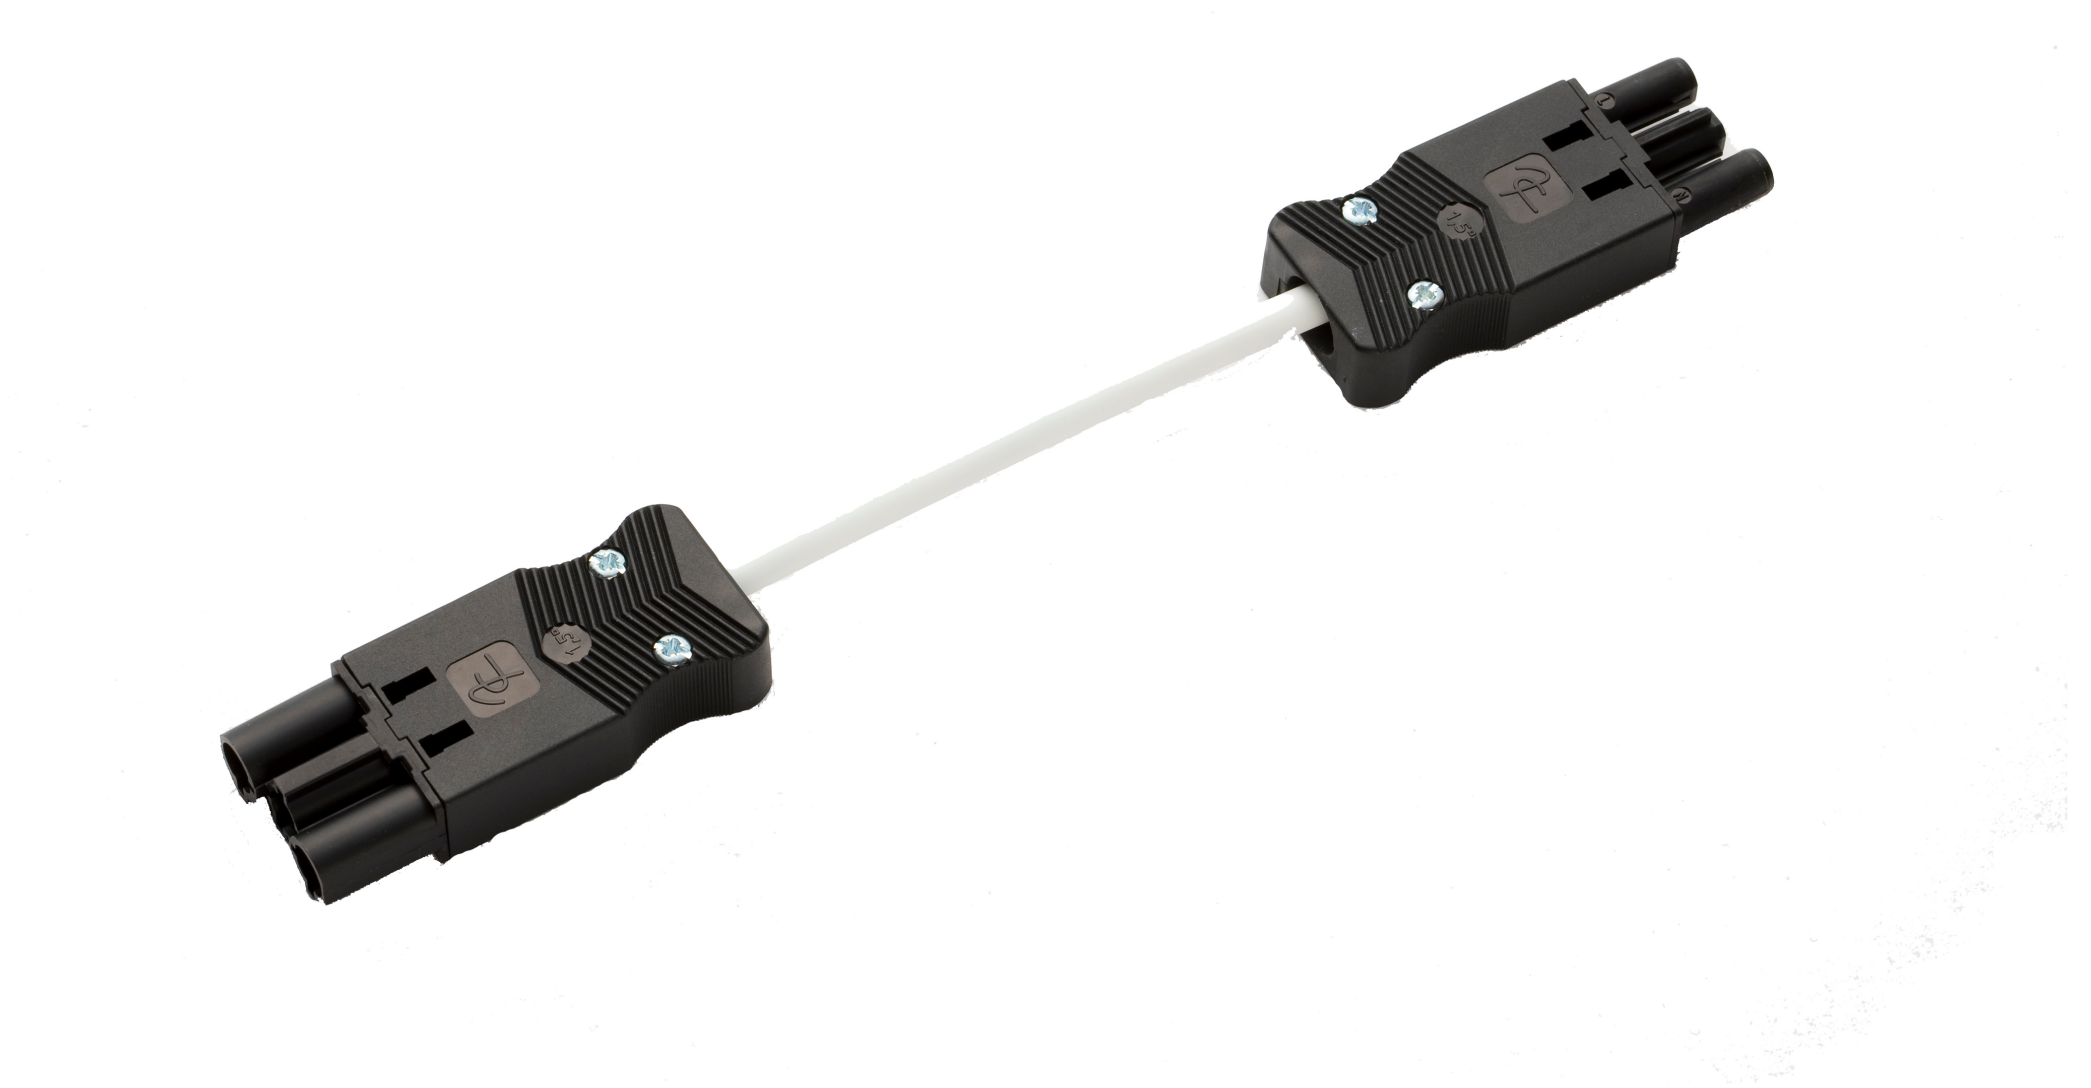

Technical Details

Cable	1.5mm LS0H white as standard. Black can be supplied as an alternative.
Prepared	Outer sheath stripped 70mm Inner cores Stripped and ferruled
Connector rating	20 amps
Latching	Using locking slide
Cable Type	LS0H ECA Fire Class DCA/CCA Fire Class available on request
Compatibility	3 pole GST type plugs and sockets
IP Rating	IP20 (IP40 plugged in)

Wiring Configurations

Brown		Live
Green & Yellow		Earth
Blue		Neutral

Product Codes

3 CORE LEADS	(Live, Earth and Neutral)
ELGF31530WL-001	3 metres
ELGF31550WL-001	5 metres
ELGF31570WL-001	7 metres

We can provide leads in various lengths and conductor sizes. Leads can also be provided wired to maintained live, and with optional white covers. (Add **E** on end of part code)
We can also offer ultrasonic welded leads. Please contact our sales team for any requests.